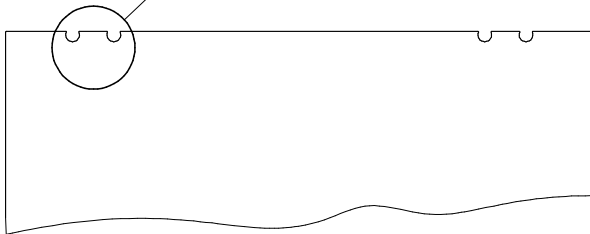

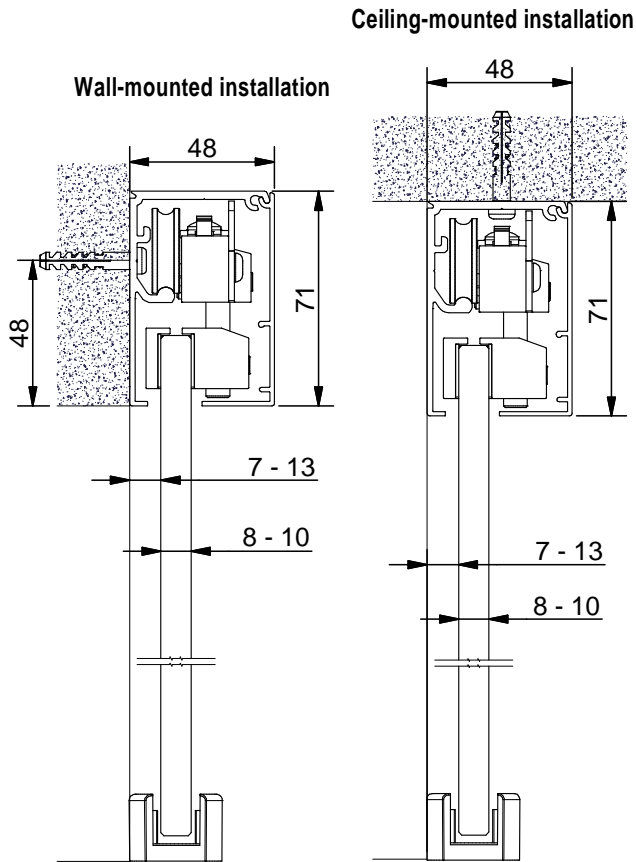




CAPACITY / DOOR :
 TRACK :
 MOVEMENT :

80 Kg
ALUMINIUM
STRAIGHT

Sliding system for glass doors - 8 or 10 mm








ACCESSORIES FOR DOUBLE-LEAF DOOR

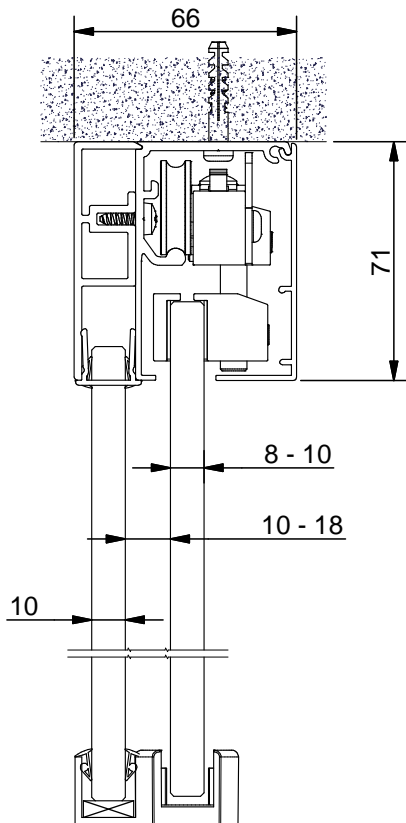
	Description
	Cable-operated synchronization kit (For double-leaf door)
	Translucent adhesive seal for door edge - Length = 3 m (Only for double-leaf door)













READY-TO-INSTALL SETS

	Description	Track	Item Nr
Wall-mounted installation	Wall mounted - opening of 0,73m to 0,83m	1.70 m	GB0100
	Wall mounted - opening of 0,83m to 0,93m	1.90 m	GB0101
	Wall mounted - opening of 0,93m to 1,13m	2.30 m	GB0102
	Wall mounted - opening of 1,13m to 1,33m	2.70 m	GB0103
	Wall mounted - opening of 1,33m to 1,53m - 2 leaves synchro	3.00 m	GB0110
	Wall mounted - opening of 1,53m to 1,73m - 2 leaves	3.40 m	GB0111
	Wall mounted - opening of 1,53m to 1,73m - 2 leaves synchro	3.40 m	GB0112
	Wall mounted - opening of 1,73m to 1,93m - 2 leaves	3.80 m	GB0113
	Wall mounted - opening of 1,73m to 1,93m - 2 leaves synchro	3.80 m	GB0114
	Wall mounted - opening of 1,93m to 2,13m - 2 leaves	4.20 m	GB0115
	Wall mounted - opening of 1,93m to 2,13m - 2 leaves synchro	4.20 m	GB0116
	Wall mounted - opening of 2,13m to 2,33m - 2 leaves	4.60 m	GB0117
Ceiling-mounted installation	Ceiling mounted - opening of 0,73m to 0,83m	1.70 m	GB0200
	Ceiling mounted - opening of 0,83m to 0,93m	1.90 m	GB0201
	Ceiling mounted - opening of 0,93m to 1,13m	2.30 m	GB0202
	Ceiling mounted - opening of 1,13m to 1,33m	2.70 m	GB0203
	Ceiling mounted - opening of 1,33m to 1,53m - 2 leaves synchro	3.00 m	GB0210
	Ceiling mounted - opening of 1,33m to 1,53m - 2 leaves	3.40 m	GB0211
	Ceiling mounted - opening of 1,53m to 1,73m - 2 leaves synchro	3.40 m	GB0212
	Ceiling mounted - opening of 1,73m to 1,93m - 2 leaves	3.80 m	GB0213
	Ceiling mounted - opening of 1,73m to 1,93m - 2 leaves synchro	3.80 m	GB0214
	Ceiling mounted - opening of 1,93m to 2,33m - 2 leaves	4.20 m	GB0215
	Ceiling mounted - opening of 1,93m to 2,13m - 2 leaves synchro	4.20 m	GB0216
	Ceiling mounted - opening of 2,13m to 2,33m - 2 leaves	4.60 m	GB0217
Ceiling mounted - opening of 2,13m to 2,33m - 2 leaves synchro	4.60 m	GB0218	
Ceiling mounted - opening of 2,33m to 2,53m - 2 leaves	5.00 m	GB0219	
Ceiling mounted - opening of 2,33m to 2,53m - 2 leaves synchro	5.00 m	GB0220	


SET CONTENTS

	Description
	Anodized aluminium track with holes For wall or ceiling-mounted installation
	Anodized aluminium pelmet
	Roller kit with glass clamps and damper
	End stops
	Floor guide, end caps and fastening pelmet clips
	Installation instructions and tools

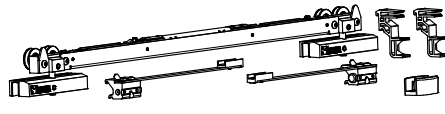
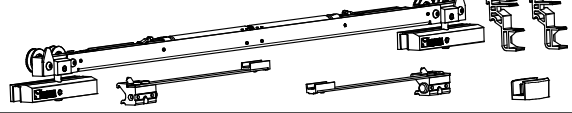
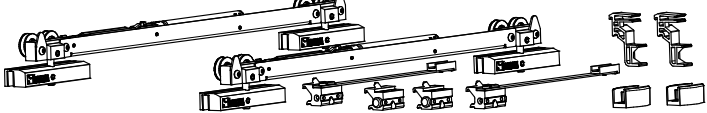
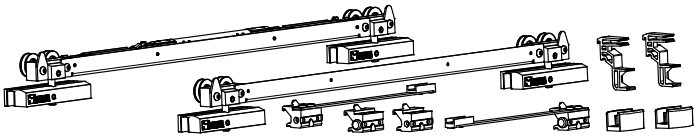
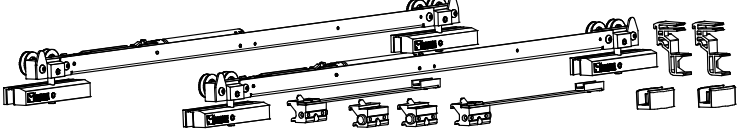
Ceiling-mounted installation with fixed glass partition

TRACKS AND PROFILES, BY PIECE

	Description	Item Nr
	Anodised track without holes - Length 6m	GB6010
	Anodised track, drilled - Length upon request - Wall mounted installation - Length < 3m - Wall mounted installation - 3m < length < 6m - Ceiling mounted installation - Length < 3m - Ceiling mounted installation - 3m < length < 6m - Fixed glass installation - Length < 3m - Fixed glass installation - 3m < length < 6m	GB6101 GB6102 GB6201 GB6202 GB6301 GB6302
	Anodised aluminium pelmet - Length 6m - Special length on request < 3m - Special length on request of 3m to 6m	GB6000 GB6001 GB6002
	Anodised aluminium profile for fixed wall - Length 6m - Special length on request < 3m - Special length on request of 3m to 6m	GB6310 GB6311 GB6312
	Screw for fixed wall profile (100x) (3 screws per meter)	GB5356
	Anodised aluminium profile to hide the fixed partition in the opening bay - Length 3m - Special length on request	GB6320 GB6321
	Anodised aluminium U-profile for fixed wall - Length 6m - Length 3m - Special length on request < 3m - Special length on request of 3m to 6m	GB6330 GB6331 GB6332 GB6333
	End cap for U-profile	GB5355
	Grey seal for glass - Length on request	GB5350
	Translucent adhesive seal for door edge - Length = 3 m	GB5351
	Set of aluminium anodised end caps For Ceiling or wall-mounting	GB3000
	Set of aluminium anodised end caps For fixed glass	GB3300

OPTIONS

	Description	Item Nr
	Drilling template, for GB6010 track	GB5015

HARDWARE, BY PIECE

	Description	Item Nr
	HARDWARE FOR OPENING OF 0,73m TO 0,83m - 1 Roller kit with glass clamps and damper - 2 End stops - 1 Floor guide, 2 fastening pelmet clips - Installation instructions and tools	GB5000
	HARDWARE FOR OPENING OF 0,83m TO 1,33m - 1 Roller kit with glass clamps and damper - 2 End stops - 1 Floor guide, 2 fastening pelmet clips - Installation instructions and tools	GB5001
	HARDWARE FOR OPENING OF 1,33m TO 1,53m SYNCHRO - 2 Roller kits with glass clamps and damper - 4 End stops - 2 Floor guides, 2 fastening pelmet clips - 1 Synchronization set - 1 Seal for door edge - Installation instructions and tools	GB5002
	HARDWARE FOR OPENING OF 1,53m TO 1,73m SYNCHRO - 2 Roller kits with glass clamps and damper - 4 End stops - 2 Floor guides, 2 fastening pelmet clips - 1 Synchronization set - 1 Seal for door edge - Installation instructions and tools	GB5003
	HARDWARE FOR OPENING OF 1,73m TO 2,53m SYNCHRO - 2 Roller kits with glass clamps and damper - 4 End stops - 2 Floor guides, 2 fastening pelmet clips - 1 Synchronization set - 1 Seal for door edge - Installation instructions and tools	GB5004

All specifications can be modified without prior notice