

# INTEC® sliding systems for glass doors



*Integrated clamps in track:*

*invisible fittings!*



- For 8 or 10-mm panels up to 80 kg maximum
- The smallest door/wall clearance on the market: from 7 to 18 mm (adjustable)
- Quick and easy installation: one-piece hanger/damper kit
- Integrated door closing damper (closing and opening)
- For single or double doors (synchronised)  
Suitable for wall and ceiling fixing



80 kg max.

*All our ranges can be found at:*

[www.mantion.com](http://www.mantion.com)

[www.la-porte-en-verre.com](http://www.la-porte-en-verre.com)

MANTION S.A.S

7, rue Gay Lussac – ZI de Trépillot  
25000 Besançon – FRANCE



Phone +33 3 81 85 38 73/74 – Fax. +33 3 81 53 29 76

E-mail: [export@mantion.com](mailto:export@mantion.com)

Web: [www.mantion.com](http://www.mantion.com)

## Wall-mounted installation 1 or 2 leaves

CAPACITY/DOOR	80 KG
PANEL THICKNESS	8 - 10 MM
TRACK	ALUMINIUM
TRAVEL	STRAIGHT

### READY-TO-INSTALL SET – 1 LEAF

- Set includes:
- 1 anodised aluminium track with wall mounting holes - cut to length
  - 1 anodised aluminium track pelmet – cut to length
  - 1 roller kit with clamps and damper
  - 2 end stops
  - 2 anodised aluminium end caps
  - 2 fastening clips for pelmet
  - 1 lower guide
  - Installation instructions and tools

Item no.	Description
GB0100	For opening of 0.73 m to 0.83 m
GB0101	For opening of 0.83 m to 0.93 m
GB0102	For opening of 0.93 m to 1.13 m
GB0103	For opening of 1.13 m to 1.33 m

### READY-TO-INSTALL SET – 2 LEAVES


- Set includes:
- 1 anodised aluminium track with wall mounting holes - cut to length
  - 1 anodised aluminium track pelmet – cut to length
  - 2 roller kits with clamps and dampers
  - 4 end stops
  - 2 anodised aluminium end caps
  - 3 fastening clips for pelmet
  - 2 lower guides and 1 translucent adhesive seal for door edge
  - Installation instructions and tools

Item no.	Description
GB0111	For opening of 1.53 m to 1.73 m
GB0113	For opening of 1.73 m to 1.93 m
GB0115	For opening of 1.93 m to 2.13 m
GB0117	For opening of 2.13 m to 2.33 m
GB0119	For opening of 2.33 m to 2.53 m


### READY-TO-INSTALL SET – 2 SYNCHRONISED LEAVES

- Set includes:
- 1 anodised aluminium track with wall mounting holes - cut to length
  - 1 anodised aluminium track pelmet – cut to length
  - 2 roller kits with clamps and dampers
  - 1 cable-operated synchronisation kit
  - 4 end stops
  - 2 anodised aluminium end caps
  - 3 fastening clips for pelmet
  - 2 lower guides and 1 translucent adhesive seal for door edge
  - Installation instructions and tools

Item no.	Description
GB0110	For opening of 1.33 m to 1.53 m
GB0112	For opening of 1.53 m to 1.73 m
GB0114	For opening of 1.73 m to 1.93 m
GB0116	For opening of 1.93 m to 2.13 m
GB0118	For opening of 2.13 m to 2.33 m
GB0120	For opening of 2.33 m to 2.53 m

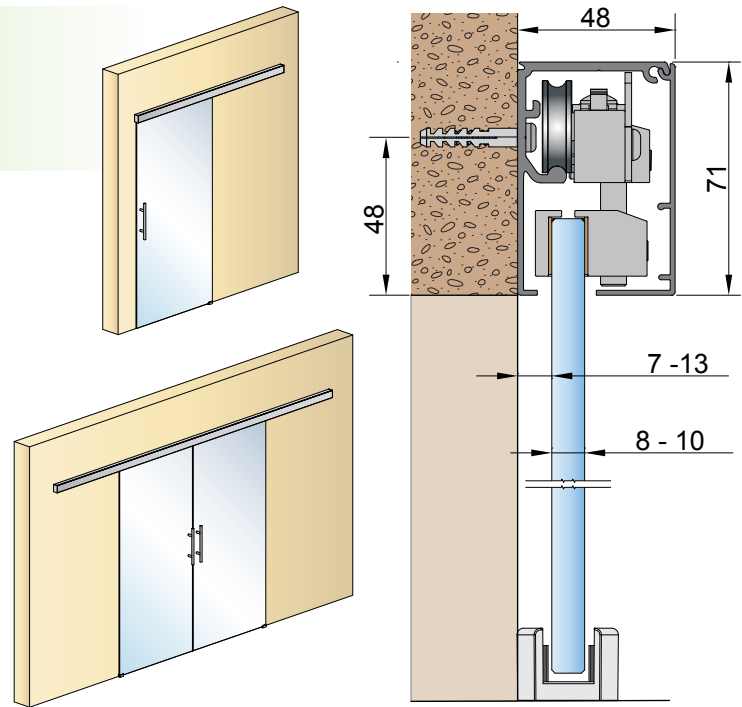

### SET CONTENTS

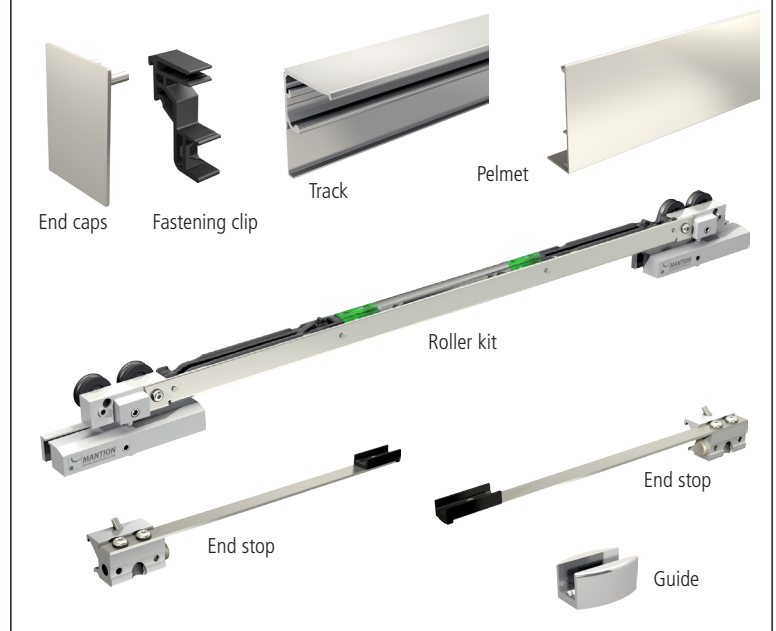

## Ceiling-mounted installation 1 or 2 leaves

CAPACITY/DOOR	80 KG
PANEL THICKNESS	8 - 10 MM
TRACK	ALUMINIUM
TRAVEL	STRAIGHT

### READY-TO-INSTALL SET – 1 LEAF

- Set includes:
- 1 anodised aluminium track with ceiling mounting holes – cut to length
  - 1 anodised aluminium track pelmet – cut to length
  - 1 roller kit with clamps and damper
  - 2 end stops
  - 2 anodised aluminium end caps
  - 2 fastening clips for pelmet
  - 1 lower guide
  - Installation instructions and tools

Item no.	Description
GB0200	For opening of 0.73 m to 0.83 m
GB0201	For opening of 0.83 m to 0.93 m
GB0202	For opening of 0.93 m to 1.13 m
GB0203	For opening of 1.13 m to 1.33 m

### READY-TO-INSTALL SET – 2 LEAVES


- Set includes:
- 1 anodised aluminium track with ceiling mounting holes – cut to length
  - 1 anodised aluminium track pelmet – cut to length
  - 2 roller kits with clamps and dampers
  - 4 end stops
  - 2 anodised aluminium end caps
  - 3 fastening clips for pelmet
  - 2 lower guides and 1 translucent adhesive seal for door edge
  - Installation instructions and tools

Item no.	Description
GB0211	For opening of 1.53 m to 1.73 m
GB0213	For opening of 1.73 m to 1.93 m
GB0215	For opening of 1.93 m to 2.13 m
GB0217	For opening of 2.13 m to 2.33 m
GB0219	For opening of 2.33 m to 2.53 m


### READY-TO-INSTALL SET – 2 SYNCHRONISED LEAVES

- Set includes:
- 1 anodised aluminium track with ceiling mounting holes – cut to length
  - 1 anodised aluminium track pelmet – cut to length
  - 2 roller kits with clamps and dampers
  - 1 cable-operated synchronisation kit
  - 4 end stops
  - 2 anodised aluminium end caps
  - 3 fastening clips for pelmet
  - 2 lower guides and 1 translucent adhesive seal for door edge
  - Installation instructions and tools


Item no.	Description
GB0210	For opening of 1.33 m to 1.53 m
GB0212	For opening of 1.53 m to 1.73 m
GB0214	For opening of 1.73 m to 1.93 m
GB0216	For opening of 1.93 m to 2.13 m
GB0218	For opening of 2.13 m to 2.33 m
GB0220	For opening of 2.33 m to 2.53 m

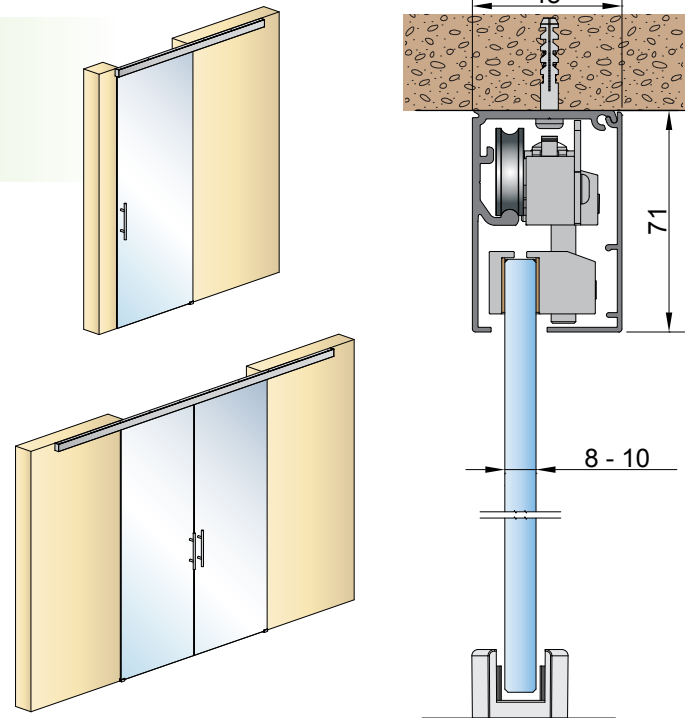

### SET CONTENTS

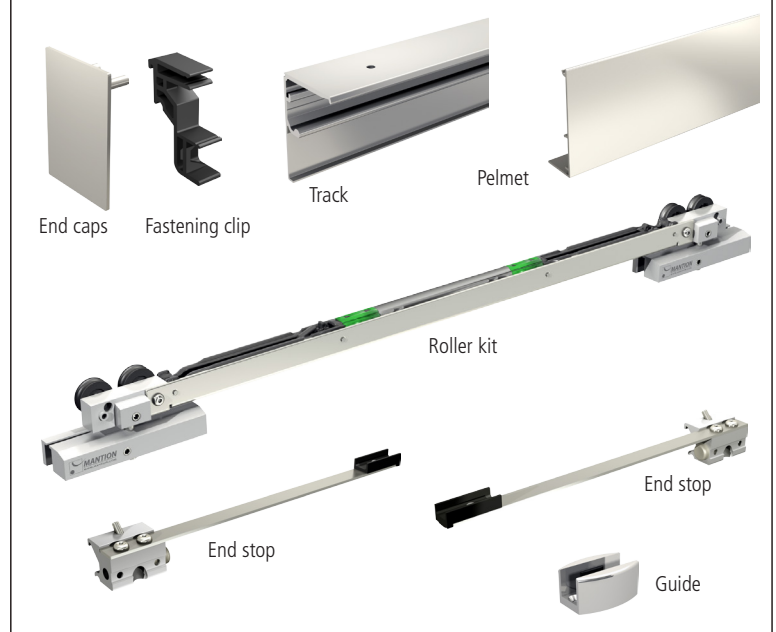

### EXPLODED VIEW (identical for all versions)

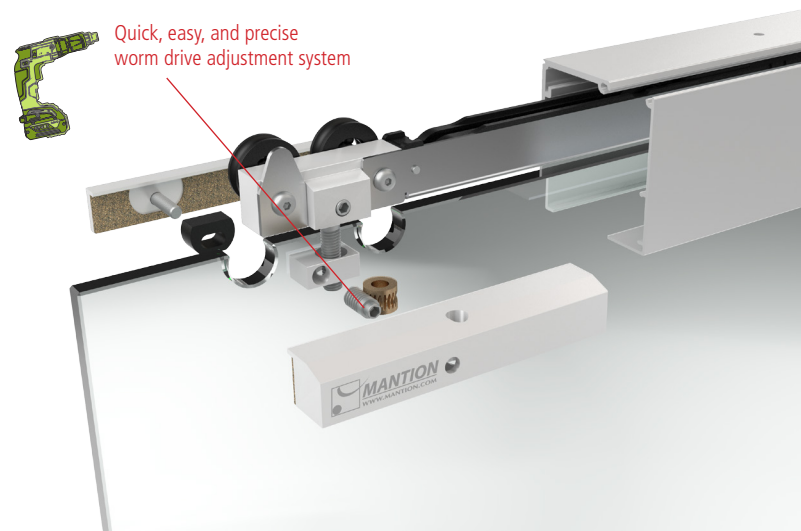

## Ceiling-mounted installation with fixed glass partition 1 or 2 leaves

CAPACITY/DOOR	80 KG
PANEL THICKNESS	8 - 10 MM
TRACK	ALUMINIUM
TRAVEL	STRAIGHT

### TRACKS AND PELMET – ITEMS AVAILABLE BY PIECE

Item no.	Description
GB6300	Anodised aluminium track, drilled for installation of fixed partition. Length = 6 m*
GB6310	Anodised aluminium profile for installation of the fixed glass panel. To be screwed on the track – Length = 6 m*
GB6000	Anodised aluminium pelmet to be clipped on the track. Length = 6 m*
GB6320	Anodised aluminium profile to hide the fixed partition in the opening bay – Length = 3 m*
GB6331	Anodised aluminium U-profile to be screwed into floor and wall to retain the fixed glass partition – Length = 3 m*
GB6330	Anodised aluminium U-profile to be screwed into floor and wall to retain the fixed glass partition – Length = 6 m*
GB5350	Grey seal for glass, lengths upon request.
GB5351	Translucent adhesive seal for sticking on the edge of the glass panel – Length = 3 m
GB3300	Set of anodised aluminium end caps.





\* Special lengths upon request

### HARDWARE FOR 1 LEAF

Item no.	Description	
GB5000	Hardware for opening of <b>0.73 m to 0.83 m</b> including: - 1 roller kit with clamps and damper - 2 end stops - 2 fastening clips for pelmet - 1 lower guide - Installation instructions and tools	
	GB5001	Hardware for opening of <b>0.83 m to 1.33 m</b> including: - 1 roller kit with clamps and damper - 2 end stops - 2 fastening clips for pelmet - 1 lower guide - Installation instructions and tools

### HARDWARE FOR 2 SYNCHRONISED LEAVES

Item no.	Description		
GB5002	Hardware for opening of <b>1.33 m to 1.53 m</b> including: - 2 roller kits with clamps and dampers - 1 cable-operated synchronisation kit - 4 end stops - 3 fastening clips for pelmet - 2 lower guides and 1 translucent adhesive seal for door edge - Installation instructions and tools		
	GB5003	Hardware for opening of <b>1.53 m to 1.73 m</b> including: - 2 roller kits with clamps and dampers - 1 cable-operated synchronisation kit - 4 end stops - 3 fastening clips for pelmet - 2 lower guides and 1 translucent adhesive seal for door edge - Installation instructions and tools	
		GB5004	Hardware for opening of <b>1.73 m to 2.53 m</b> including: - 2 roller kits with clamps and dampers - 1 cable-operated synchronisation kit - 4 end stops - 3 fastening clips for pelmet - 2 lower guides and 1 translucent adhesive seal for door edge - Installation instructions and tools

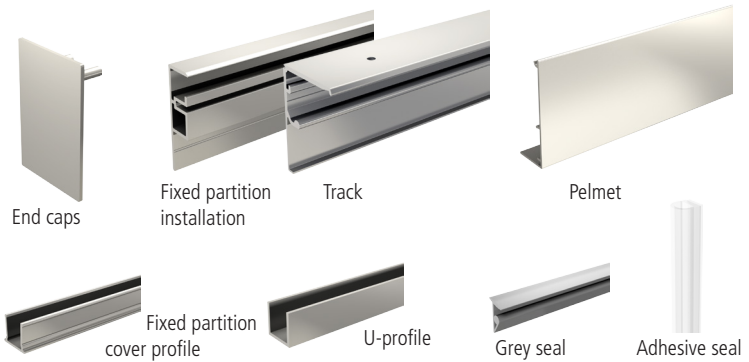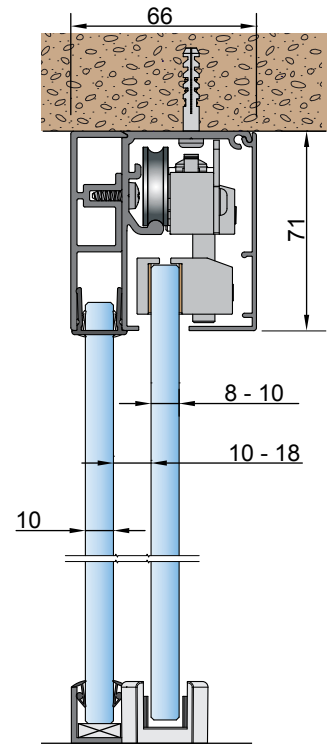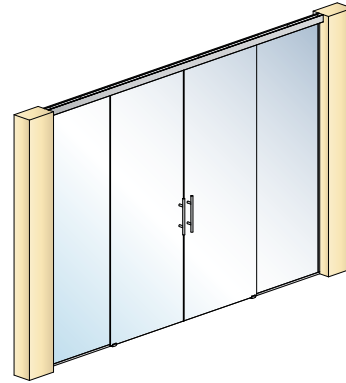

### HARDWARE CONTENTS

