




## System for wardrobe doors

# PICOSTAR 2®

For panel thickness: from 12 to 19 mm

See details of the standard EN 1527 p.4




CAPACITY/PANEL	55 KG
TRACK	ALUMINIUM
MOVEMENT	STRAIGHT

### SETS\* packaged in PET tube

Item Nr.	Description
72/200A	Set of natural anodised tracks in 2 m lengths for 2 panels: - 1 aluminium set of upper and lower tracks + housing in 2 m. length - 1 aluminium finishing profile 61T of 2 m. length - 4 PICO59 rollers and 4 PICO59 guides - Screws and mounting instructions
72/200B	Ditto lacquered white (RAL 9016) finishing
72/300A	Set of natural anodised tracks in 3 m lengths for 3 panels: - 1 aluminium set of upper and lower tracks + housing in 3 m. length - 2 aluminium finishing profile 61T of 2 m. length - 6 PICO59 rollers and 6 PICO59 guides - Screws and mounting instructions
72/300B	Ditto lacquered white (RAL 9016) finishing

### SETS PICOSTAR 2

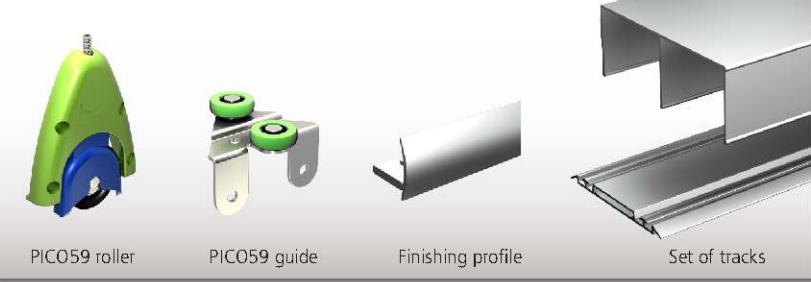

\*Our handles are sold separately.

### HANDLES 2.8 m long – packaged by 2 in PET tube

71G/280A	Set of 2 anodized aluminium "drop" handles. Suiting for panels from 12 to 19 mm thickness. - 2.8 m. length Furnished with 6 snap-on bracket (3 on each side on the panel)
71G/280B	Ditto lacquered white (RAL 9016) finishing
71V/280A	Set of 2 anodized aluminium "coma" handles. Suiting for panels from 12 to 19 mm thickness. - 2.8 m. length Furnished with 6 snap-on bracket (3 on each side on the panel)
71V/280B	Ditto lacquered white (RAL 9016) finishing

### PICOSTAR 2 HANDLES



### Components by piece:

#### SET OF UPPER AND LOWER TRACKS


70/600A	Aluminium set of upper and lower tracks + housing in 6 m. length
70/600B	Ditto lacquered white (RAL 9016) finishing

#### GEAR

PICO59	Gear for equipping 1 panel: - 2 rollers equipped with nylon rollers mounted on precision ball bearings - 2 guides equipped with nylon rollers mounted on precision ball bearings - Fixing screw and installation instructions	10
--------	--	----

#### FINISHING PROFILES in lengths of 2 m

61T/200A	Anodized aluminum profile (bottom of the door)- 2 m. length	8
61T/200B	Ditto lacquered white (RAL 9016) finishing	8

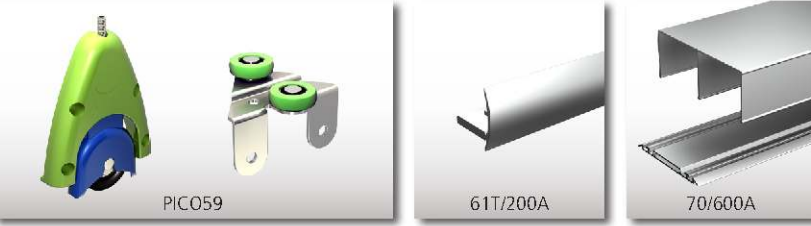

It is **easy** to determine the solution!  
Simply enter the dimensions of your opening and your options.  
You will also have access to the full details of the products and plans.

discover SLIDSOFT® on [WWW.MANTION.COM](http://WWW.MANTION.COM)

Top design range for the equipment of wardrobes and cupboards:


- **QUALITY:** The upper guide and roller are equipped with ball bearings for easy and silent motion
- **DESIGN:** Reversible upper track: one curved face and one flat face
- **INGENIOUS:** suitable for panels from 12 to 19 mm thickness
- **SAFETY:** Antiderailing system on mountings
- **CONVENIENCE:** Damper closer system, keeps door closed
- **SLIDSOFT®:** online calculator




panel from 12 to 19 mm

PICOSTAR 2®


PICOSTAR 2®

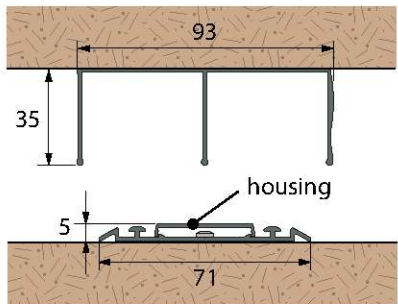



Set of PICOSTAR tracks  
(2 - 3 - 6 m)

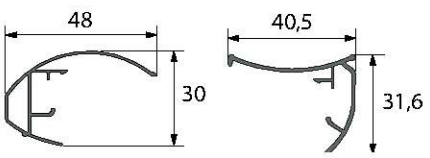



DROP handle 71G/280A  
71G/280B  
COMMA handle 71V/280A  
71V/280B

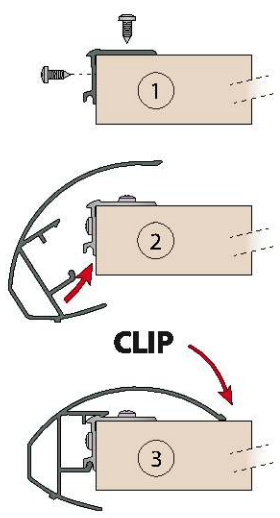

Profiles are snapped on in 3 steps:  
it just takes a simple click!  
(example shown with DROP handle)

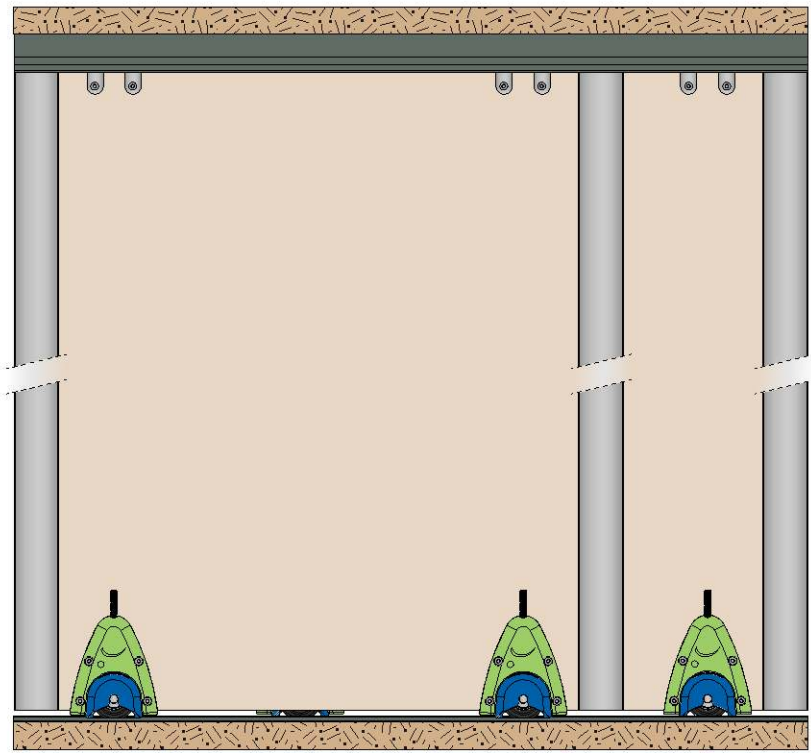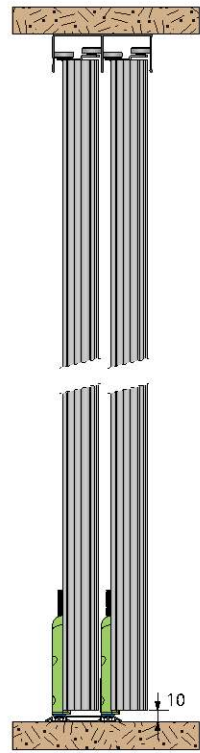

See accessories p.26

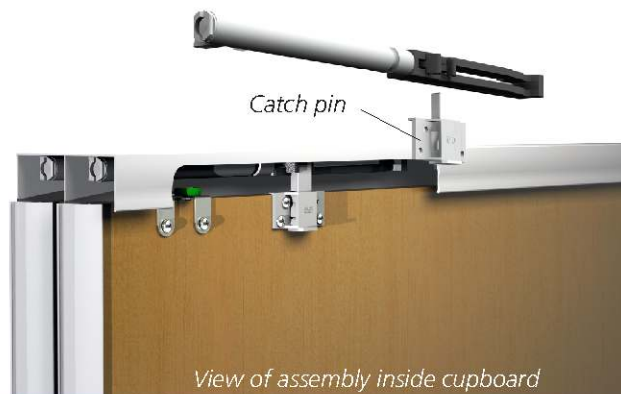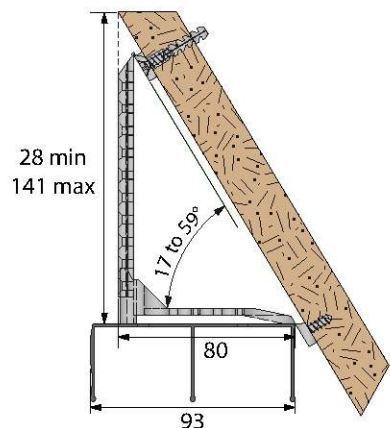


View of assembly inside cupboard



## System for wardrobe doors

# PICOSTAR 18®

For panel thickness of 18 mm




See details of the standard EN 1527 p.4

CAPACITY/PANEL	55 KG
TRACK	ALUMINIUM
MOVEMENT	STRAIGHT

### SETS\* packaged in PET tube

Item Nr.	Description
72/200A	Set of natural anodised tracks in 2 m lengths for 2 panels: - 1 aluminium set of upper and lower tracks + housing in 2 m. length - 1 aluminium finishing profile 61T of 2 m. length - 4 PICO59 rollers and 4 PICO59 guides - Screws and mounting instructions
72/200B	Ditto lacquered white (RAL 9016) finishing
72/300A	Set of natural anodised tracks in 3 m lengths for 3 panels: - 1 aluminium set of upper and lower tracks + housing in 3 m. length - 2 aluminium finishing profile 61T of 2 m. length - 6 PICO59 rollers and 6 PICO59 guides - Screws and mounting instructions
72/300B	Ditto lacquered white (RAL 9016) finishing

### SETS PICOSTAR 18

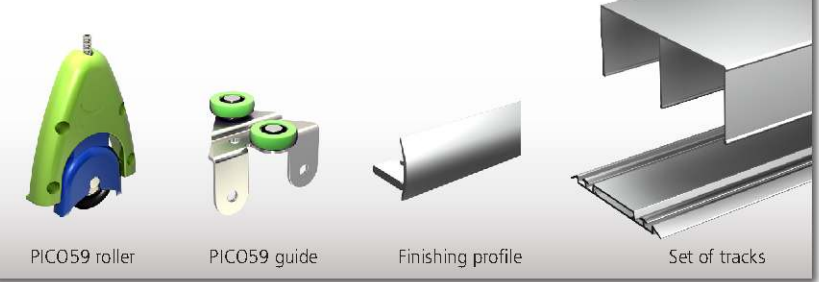

\*Our handles are sold separately.

### HANDLES 2.8 m long – packaged by 2 in PET tube

71E18/280A	Set of 2 anodized aluminium handles. Suiting for panels of 18 mm thickness. - 2.8 m. length
71E18/280B	Ditto lacquered white (RAL 9016) finishing
71H18/280A	Set of 2 anodized aluminium handles. Suiting for panels of 18 mm thickness. - 2.8 m. length
71H18/280B	Ditto lacquered white (RAL 9016) finishing

### PICOSTAR 18 HANDLES



### Components by piece:

#### SET OF UPPER AND LOWER TRACKS


70/600A	Aluminium set of upper and lower tracks + housing in 6 m. length
70/600B	Ditto lacquered white (RAL 9016) finishing

#### GEAR

PICO59	Gear for equipping 1 panel: - 2 rollers equipped with nylon rollers mounted on precision ball bearings - 2 guides equipped with nylon rollers mounted on precision ball bearings - Fixing screw and installation instructions	10
--------	--	----

#### FINISHING PROFILES in lengths of 2 m

61T/200A	Anodized aluminum profile (bottom of the door)- 2 m. length	8
61T/200B	Ditto lacquered white (RAL 9016) finishing	8

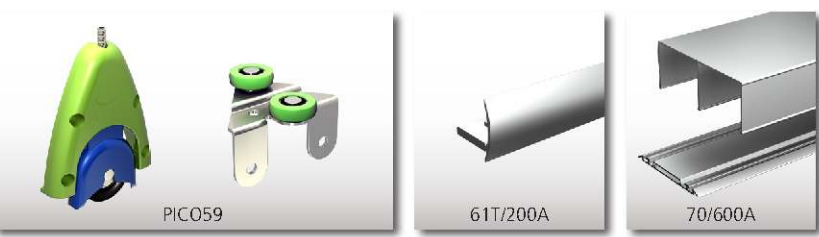

It is **easy** to determine the solution!  
Simply enter the dimensions of your opening and your options.  
You will also have access to the full details of the products and plans.

discover SLIDSOFT® on [WWW.MANTION.COM](http://WWW.MANTION.COM)


Top design range for the equipment of wardrobes and cupboards:

- **QUALITY:** The upper guide and roller are equipped with ball bearings for easy and silent motion
- **DESIGN:** Reversible upper track: one curved face and one flat face
- **SAFETY:** Antiderailing system on mountings
- **CONVENIENCE:** Damper closer system, keeps door closed
- **SLIDSOFT®:** online calculator




panels of 18 mm


PICOSTAR 18®

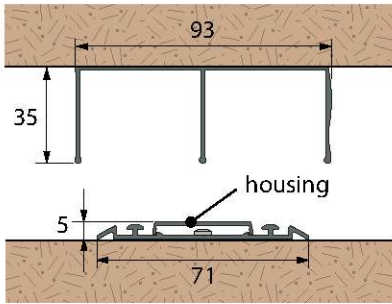

Set of PICOSTAR tracks  
(2 - 3 - 6 m)




71E18/280A - 71E18/280B


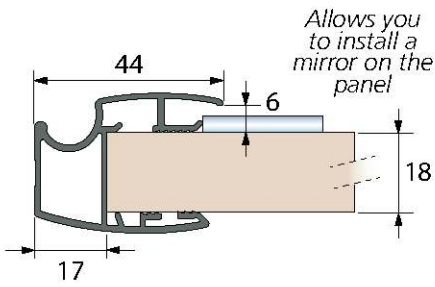


71H18/280A - 71H18/280B

## PICOSTAR 18®

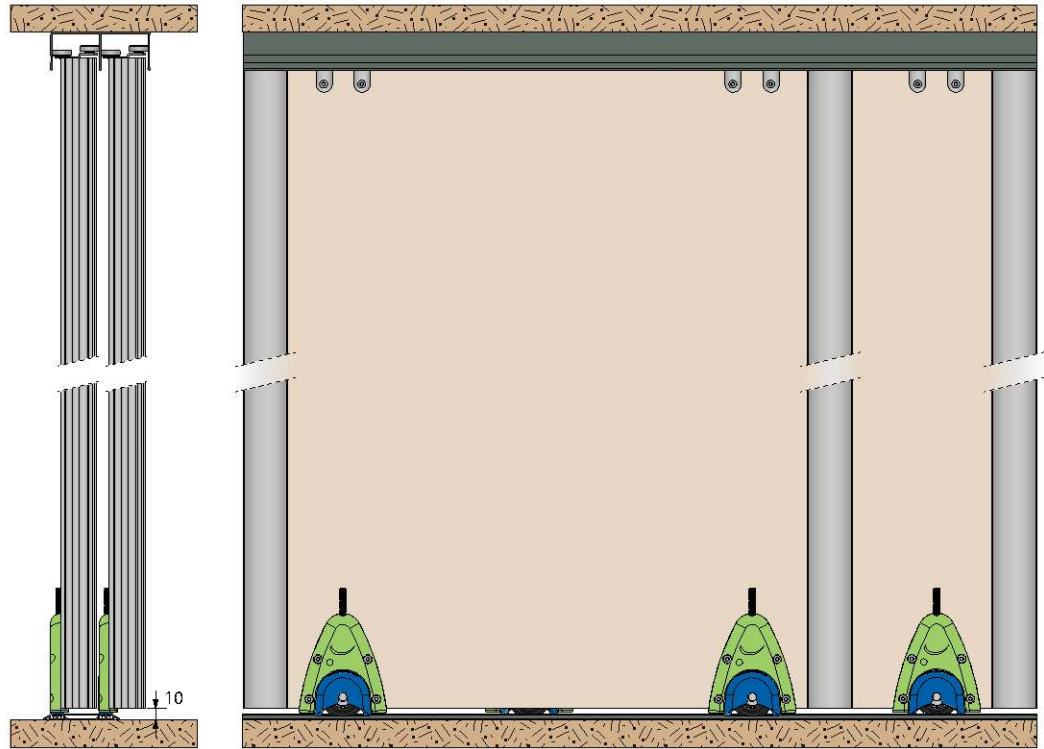

See accessories p.26

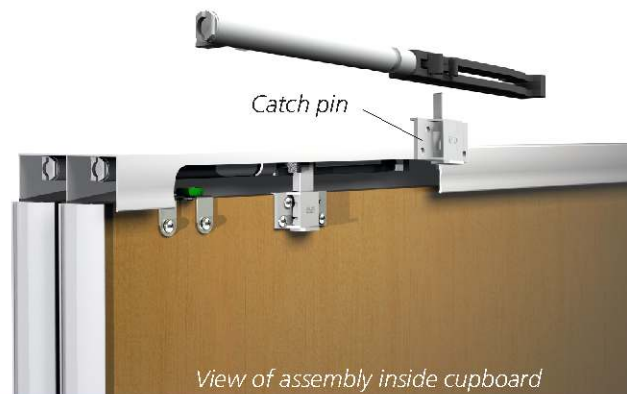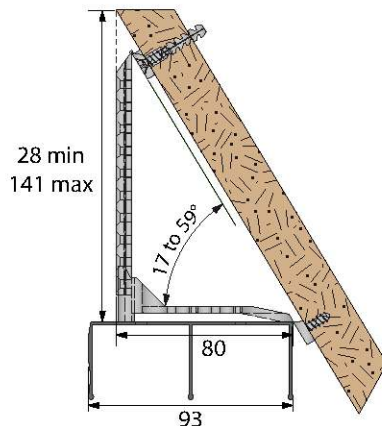

View of assembly inside cupboard




# System for wardrobe doors

## PICOSTAR 19®

For panel thickness of 19 mm

See details of the standard EN 1527 p.4



CAPACITY/PANEL	55 KG
TRACK	ALUMINIUM
MOVEMENT	STRAIGHT

### SETS\* packaged in PET tube

Item Nr.	Description
72/200A	Set of natural anodised tracks in 2 m lengths for 2 panels: - 1 aluminium set of upper and lower tracks + housing in 2 m. length - 1 aluminium finishing profile 61T of 2 m. length - 4 PICO59 rollers and 4 PICO59 guides - Screws and mounting instructions
72/200B	Ditto lacquered white (RAL 9016) finishing
72/300A	Set of natural anodised tracks in 3 m lengths for 3 panels: - 1 aluminium set of upper and lower tracks + housing in 3 m. length - 2 aluminium finishing profile 61T of 2 m. length - 6 PICO59 rollers and 6 PICO59 guides - Screws and mounting instructions
72/300B	Ditto lacquered white (RAL 9016) finishing


### SETS PICOSTAR 19



### HANDLES 2.8 m long – packaged by 2 in PET tube

71E19/280A	Set of 2 anodized aluminium handles. Suiting for panels of 19 mm thickness. - 2.8 m. length
71E19/280B	Ditto lacquered white (RAL 9016) finishing
71G19/280A	Set of 2 anodized aluminium handles. Suiting for panels of 19 mm thickness. - 2.8 m. length
71G19/280B	Ditto lacquered white (RAL 9016) finishing
71V19/280A	Set of 2 anodized aluminium handles. Suiting for panels of 19 mm thickness. - 2.8 m. length
71V19/280B	Ditto lacquered white (RAL 9016) finishing
71H19/280A	Set of 2 anodized aluminium handles. Suiting for panels of 19 mm thickness. - 2.8 m. length
71H19/280B	Ditto lacquered white (RAL 9016) finishing

### PICOSTAR 19 HANDLES

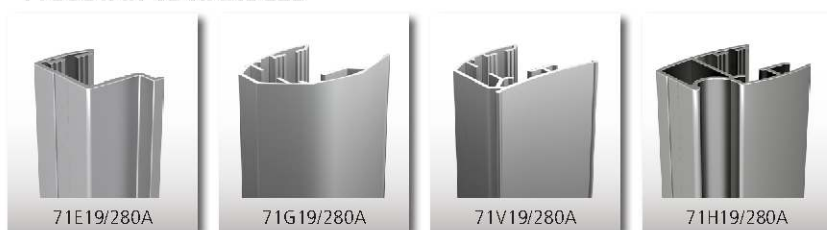

\*Our handles are sold separately.

### Components by piece:

#### SET OF UPPER AND LOWER TRACKS

70/600A	Aluminium set of upper and lower tracks + housing in 6 m. length
70/600B	Ditto lacquered white (RAL 9016) finishing

#### GEAR


PICO59	Gear for equipping 1 panel: - 2 rollers equipped with nylon rollers mounted on precision ball bearings - 2 guides equipped with nylon rollers mounted on precision ball bearings - Fixing screw and installation instructions	10
--------	--	----

#### FINISHING PROFILES in lengths of 2 m

61T/200A	Anodized aluminum profile (bottom of the door)- 2 m. length	8
61T/200B	Ditto lacquered white (RAL 9016) finishing	8

#### H-PROFILE FOR CREATING MULTI-PANEL DOORS

61H19/180A	Anodised aluminium H-profile for creating multi-panel doors. One cambered surface and one flat surface. Length = 1.8 m	8
61H19/180AM	Ditto delivered with 12 felt shims and 16 holding clips for adding a mirror section (not glued on a panel)	8

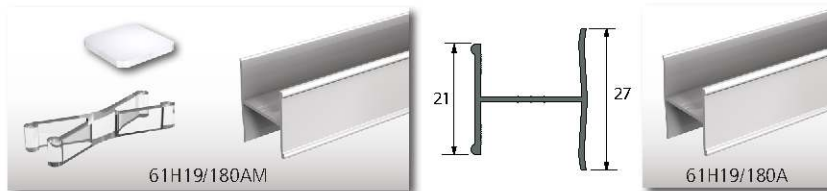

Example for mounting a mirror section with a flat surface H-profile

Example for mounting a multi-panel door with a flat surface H-profile

Example for mounting a multi-panel door with a cambered surface H-profile


Top design range for the equipment of wardrobes and cupboards:

- **QUALITY:** The upper guide and roller are equipped with ball bearings for easy and silent motion
- **DESIGN:** Reversible upper track: one curved face and one flat face
- **SAFETY:** Antiderailing system on mountings
- **CONVENIENCE:** Damper closer system, keeps door closed
- **SLIDSOFT®:** online calculator




panels of 19 mm


PICOSTAR 19®

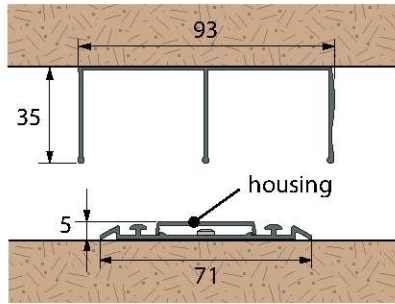


**Set of PICOSTAR tracks**  
(2 - 3 - 6 m)

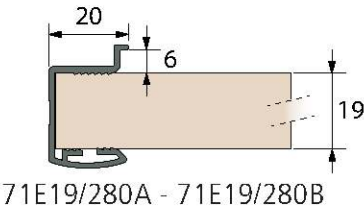


71E19/280A - 71E19/280B

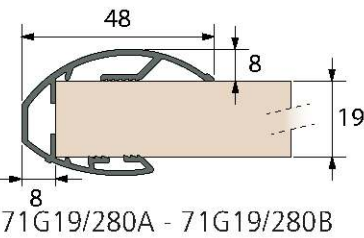

71G19/280A - 71G19/280B


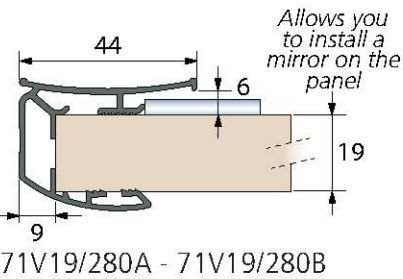


71V19/280A - 71V19/280B

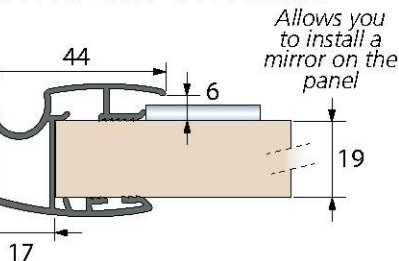

71H19/280A - 71H19/280B



PICOSTAR 19®

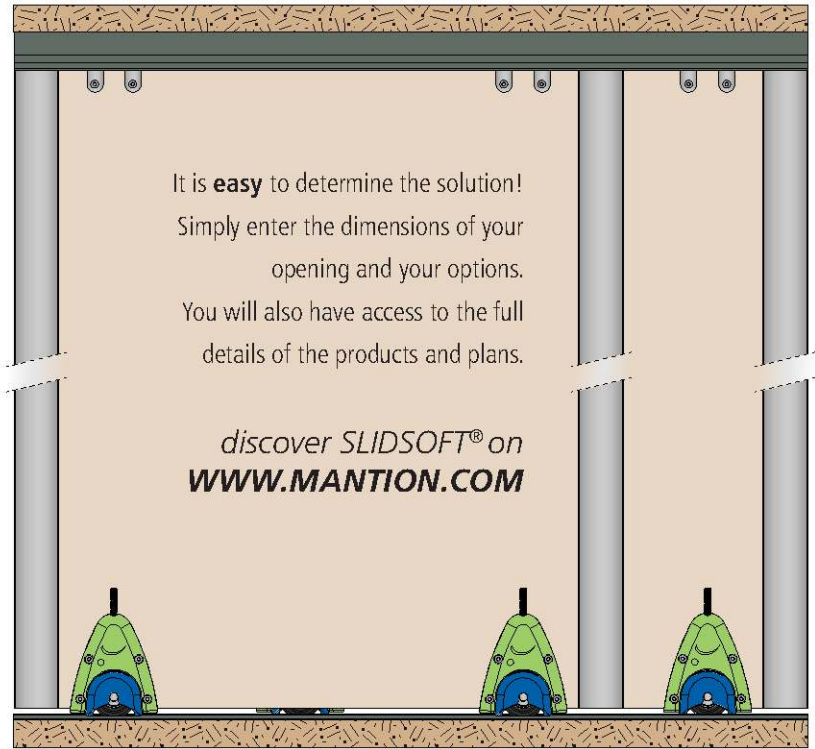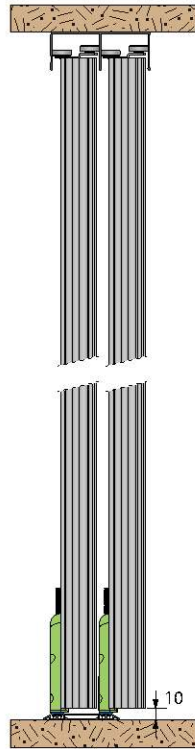

It is **easy** to determine the solution!  
Simply enter the dimensions of your opening and your options.  
You will also have access to the full details of the products and plans.

discover **SLIDSOFT®** on  
[WWW.MANTION.COM](http://WWW.MANTION.COM)

See accessories p.26

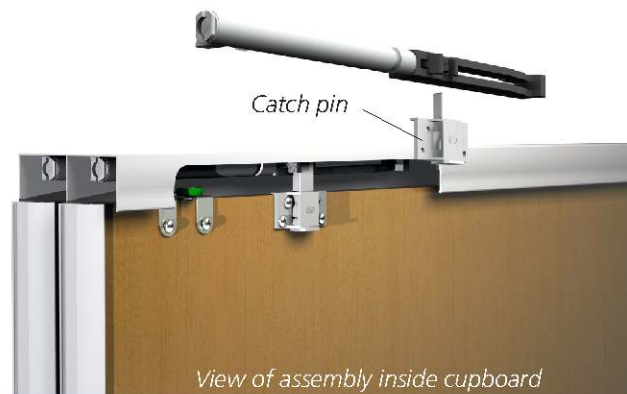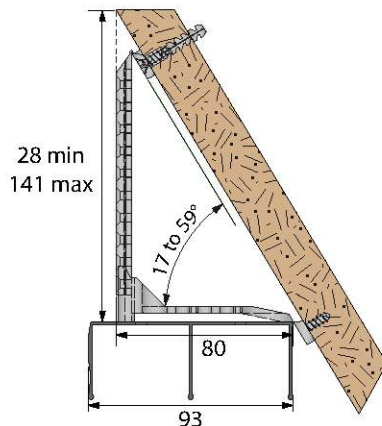

View of assembly inside cupboard