


# SAF<sup>®</sup>-200

MADE IN FRANCE  
SINCE 1920



Premium sliding system **SAF<sup>®</sup>**  
**WITH SOFT-CLOSER FOR DOORS UP TO 200 KG**

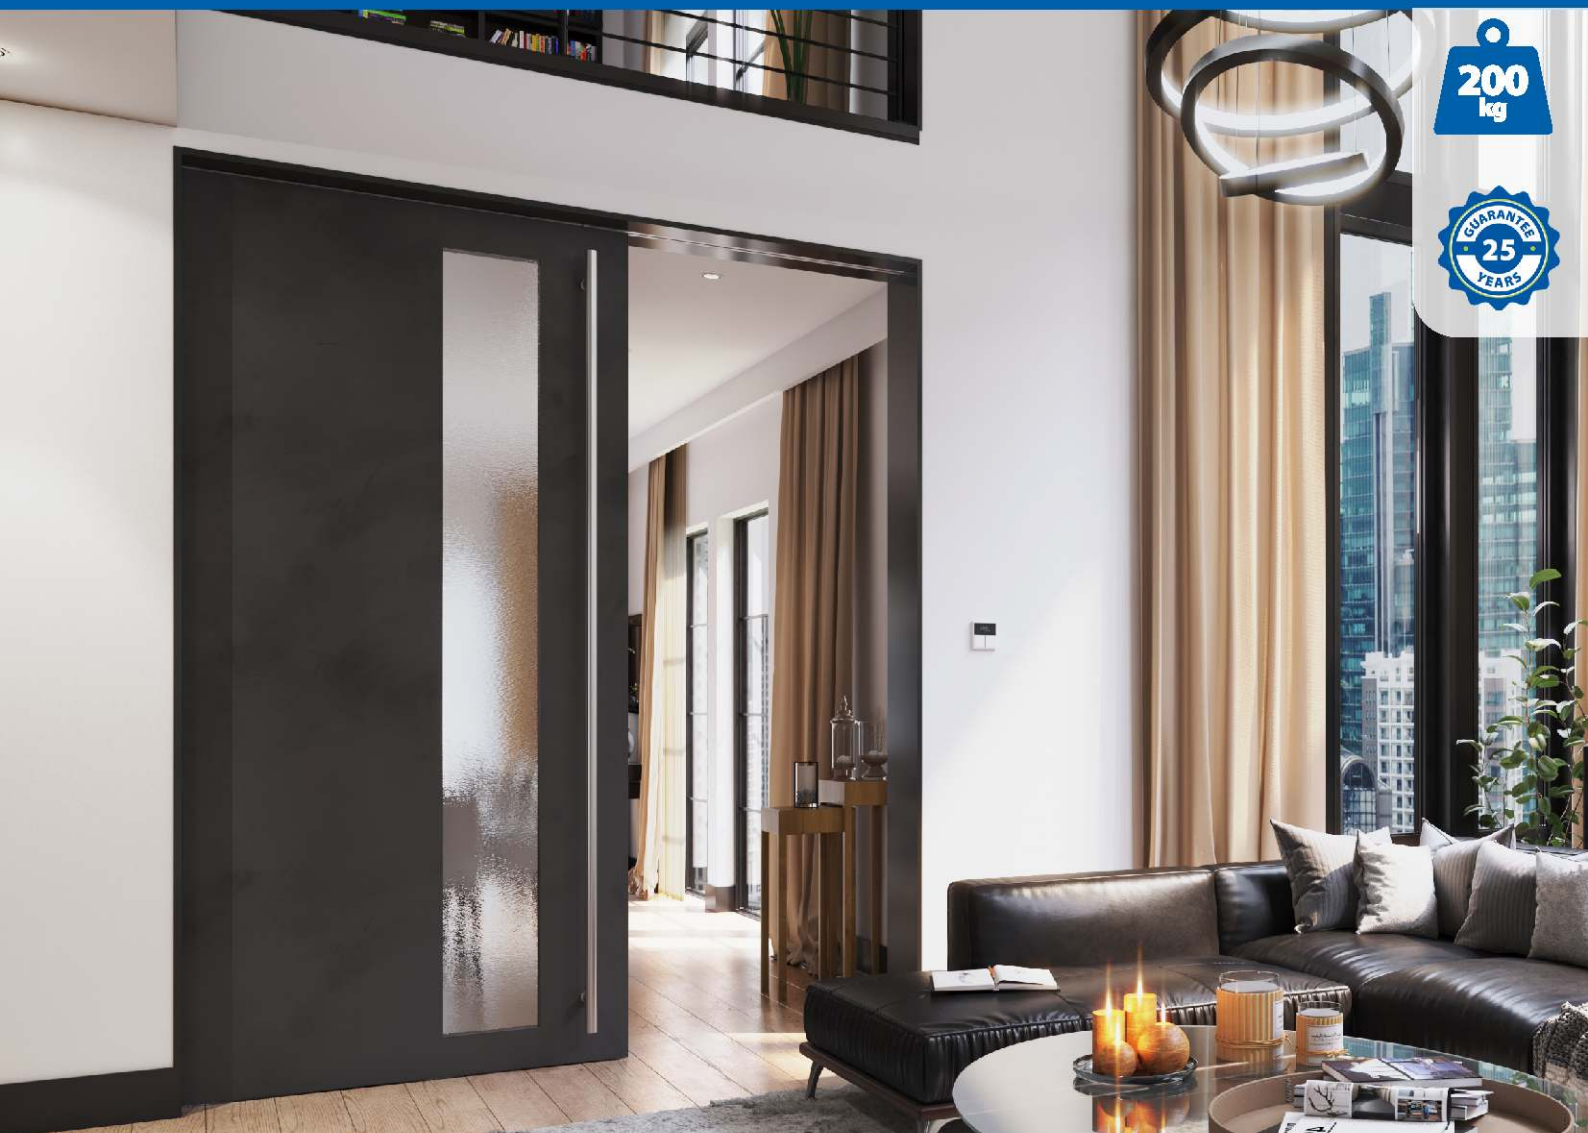

200  
kg

GUARANTEE  
25  
YEARS

Simple, reliable and quick to install!

■ **SILENT:**

Rollers mounted on ball bearings & new-generation soft-closer

■ **PRACTICAL:**

2 possible door mounting options:

■ Edge-mounted

■ Recessed profile mounting for a minimum door/track gap of 7 mm

■ **RESISTANT:**

Rollers are equipped with stainless steel framing defects  
(for long-term corrosion resistance)

Soft-closer  
**200 KG**



**NEW**

DESIGNER AND MANUFACTURER OF SLIDING SYSTEMS SINCE 1920

[www.mantion.com](http://www.mantion.com)

**MANTION**  
SLIDING SYSTEMS

MANTION SAS - 7, rue Gay Lussac - 25000 BESANÇON - FRANCE / Tel. +33 (0) 3 81 50 56 77 / [export@mantion.com](mailto:export@mantion.com)



## SOFT-CLOSER

Item no.	Description
<b>M70S</b>	Damper closer system with soft/opening and closing with over 100 mm soft closing travel distance. For doors weighing <b>120 to 200 Kg.</b> For soft closing in opening and closing, minimum width of 1550 mm is needed. Accompanied with one roller.

## TOP MOUNTING ACCESSORIES

<b>13410/600</b>	Raw aluminium track, 66.5 x 47.5 mm cross-section. L = 6 m. Reinforced track: 2.4 kg per m.
<b>13240</b>	Roller with stainless steel framing and nylon wheels mounted on ball bearing. Black cataphoresis finish.
<b>13044</b>	Mounting plate to be screwed to the edge of the door. For wood and metal frames: minimum door/rail gap 30 mm. Black cataphoresis finish.
<b>13040</b>	Flush-mounted plate in untreated aluminium for <b>28FC</b> profile.
<b>28FC-29</b>	Raw aluminium profile, section 34 x 30 mm for fixing the flush-mounted plate <b>13040</b> . Length = 29 cm.
<b>28FC-600</b>	Ditto. Length = 600 cm.
<b>29FC</b>	Set of 2 black plastic end caps for profile <b>28FC</b> .
<b>11242</b>	End Stopper to hold the panel. Black cataphoresis finish.


## BOTTOM GUIDING ACCESSORIES

<b>1109A/600</b>	Aluminium U profile 25 x 18 mm. Length = 6 m.
<b>1102XA2</b>	Plate in stainless steel with an olive guide, screwing type. For U-Profile <b>1109A</b> . For doors up to 150 Kg.
<b>1110/600</b>	Galvanized steel U profile 30 x 30 mm. Length = 6 m.
<b>1110GDL</b>	Nylon guide, screwing type - 100 x 25 x 25 mm. For U-Profile <b>1110</b> .
<b>1081</b>	Plate with an olive guide, screwing type. For U-Profile <b>1110</b> .




## CEILING MOUNTING EXAMPLES


Wood mounting with plate **13040** + profile **28FC**

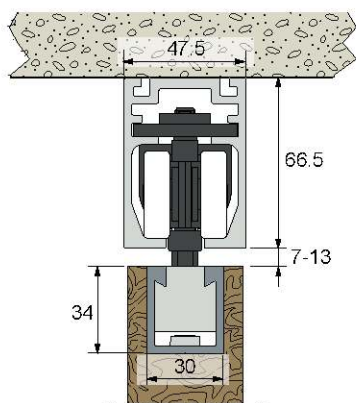

Wood mounting with plate **13044**

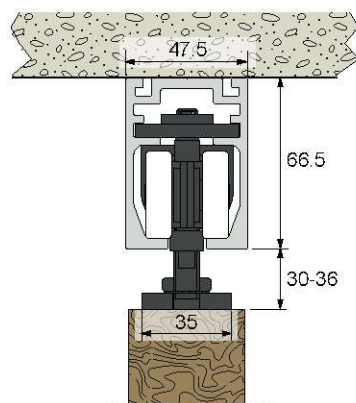


Metal mounting with plate **13044**

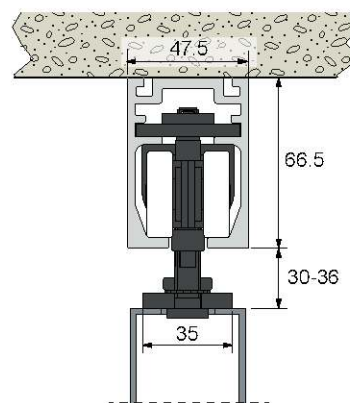


## BOTTOM GUIDING EXAMPLES

Guide **1081** + profile **1110**

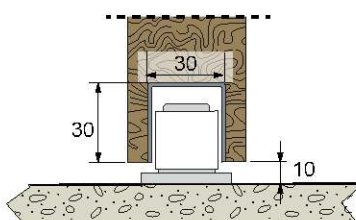

Guide **1110GDL** + profile **1110**

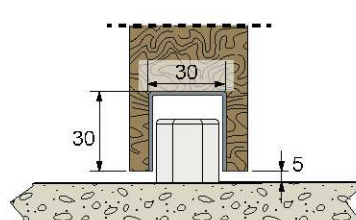

Guide **1102** + profile **1109A**

