




Premium sliding system **SAF[®]** **WITH WOODEN PELMET**



24 - 40 mm

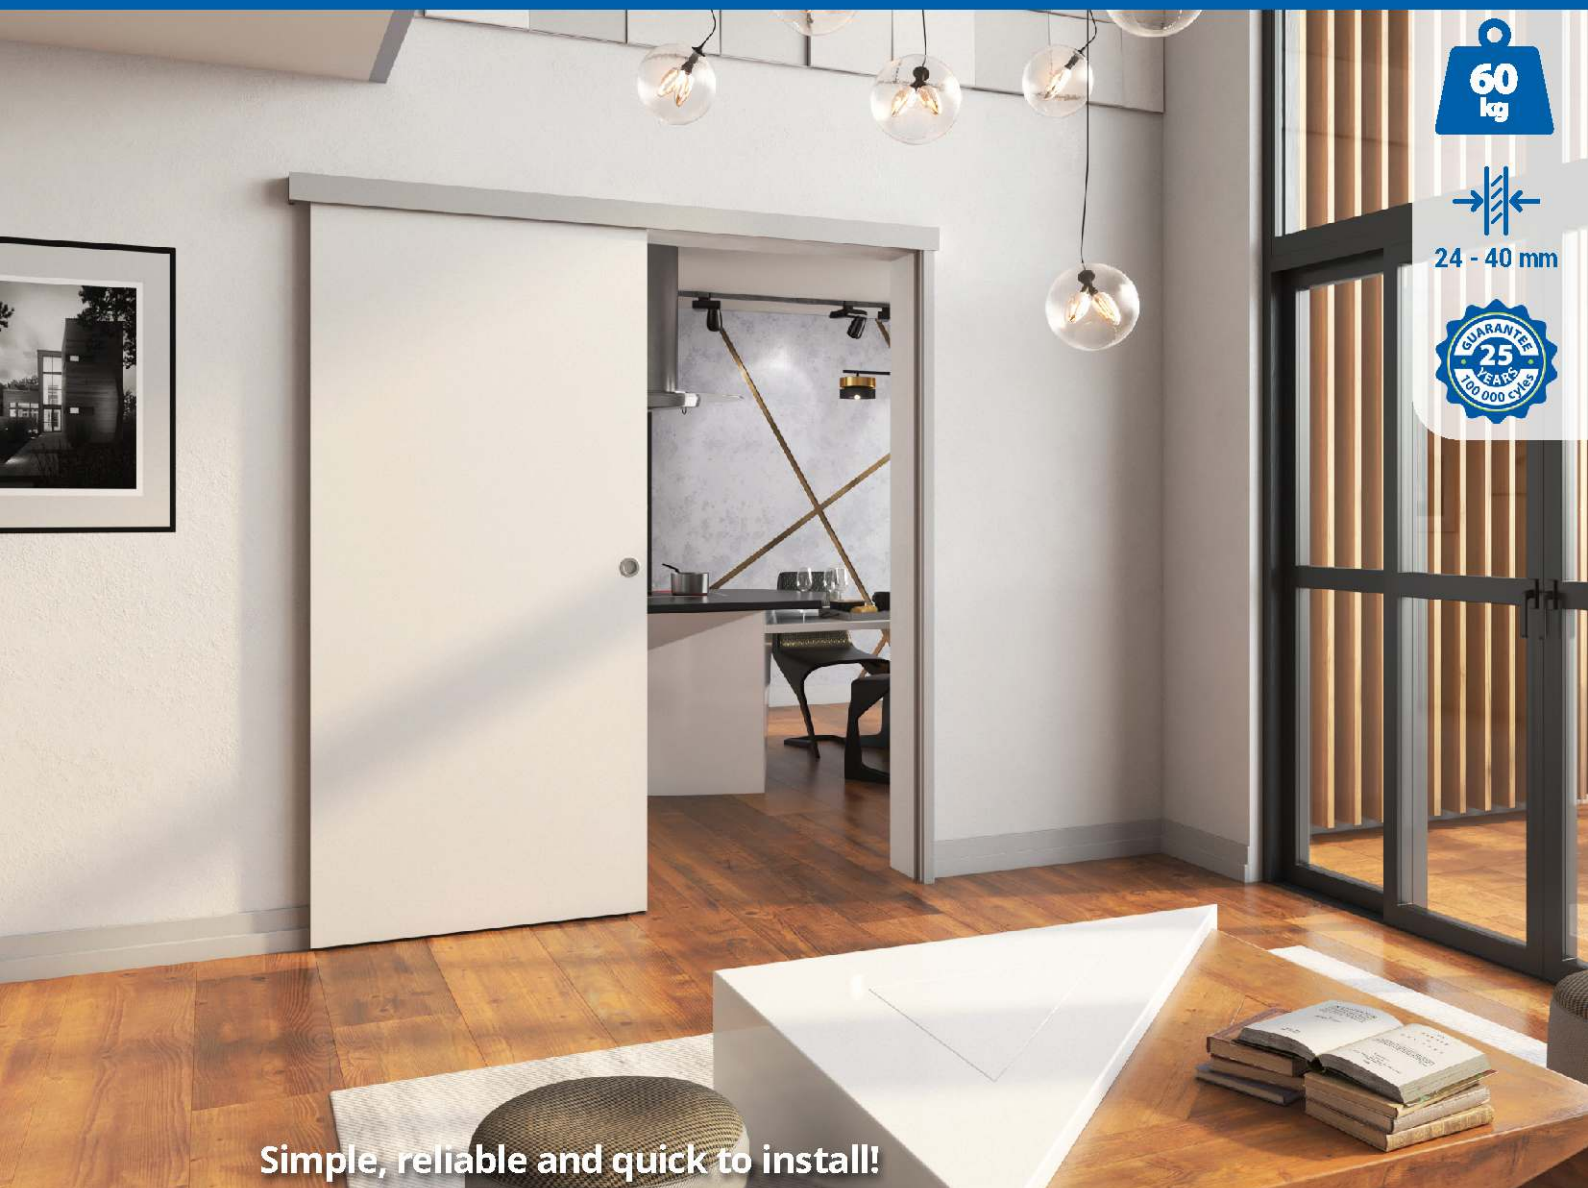

Simple, reliable and quick to install!

■ **SILENT:**

Rollers mounted on ball bearings

■ **AESTHETICS:**

White coated MDF pelmet and door jamb, ready to paint

■ **PRACTICAL:**

One-piece angle track > simplified mounting

Wooden pelmet > easy to install using clips

One piece angle track
with wooden pelmet &
door jamb





SET FOR OPENING OF 900 X 2040 MM MAX

SET SAF®WOOD 60 - WITH DOOR JAMB

Item no.	Description
SAFB60-185	Set SAF BOIS for 1 door weighing up to 60 Kg : - 1 raw aluminium track drilled, length of 1.85 m . - 1 White coated MDF door jamb with a white seal H=2.04 m - 2 white-coated MDF sticks - 1 white coated MDF pelmet (can be recut) - 3 fastening brackets for pelmet - 2 rollers 13218 + 2 plates 13036 - 2 adjustable end stops 11213 - 1 floor guide 1103R - Spanner, screws and assembly instructions





RETAIL SET FOR OPENING OF 1160 X 2150 MM MAX : Suitable for large openings!

SET SAF®WOOD 60 - WITHOUT DOOR JAMB

Item no.	Description
SAFB60R-241	Set SAF BOIS for 1 door weighing up to 60 Kg : - 1 raw aluminium track drilled, length of 2.41 m . - 1 white coated MDF pelmet (can be recut) - 3 fastening brackets for pelmet - 2 rollers 13218 + 2 plates 13036 - 2 adjustable end stops 11213 - 1 floor guide 1103R - Spanner, screws and assembly instructions

DOOR JAMB SET SAF®WOOD 60

Item no.	Description
SAFB60T-215	Door jamb SAF-WOOD : - 1 White coated MDF door jamb with a white seal H=2.15 m - 2 white-coated MDF sticks

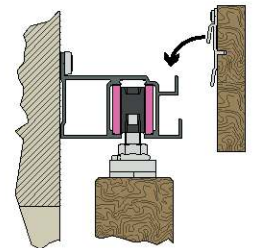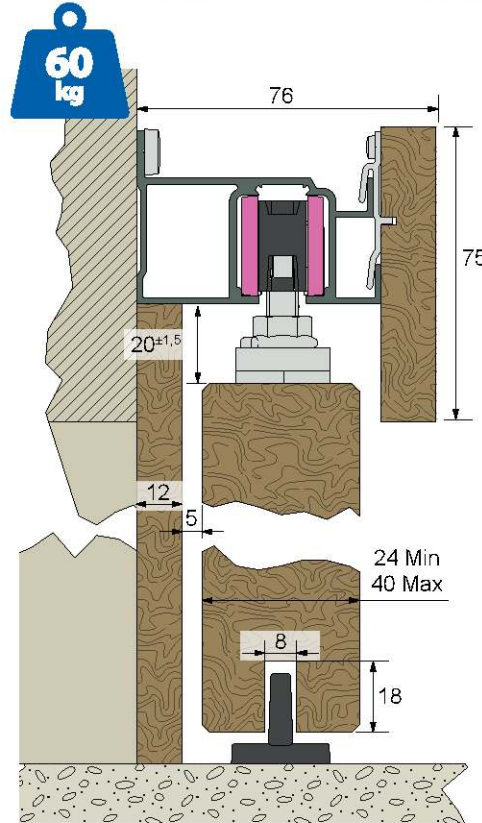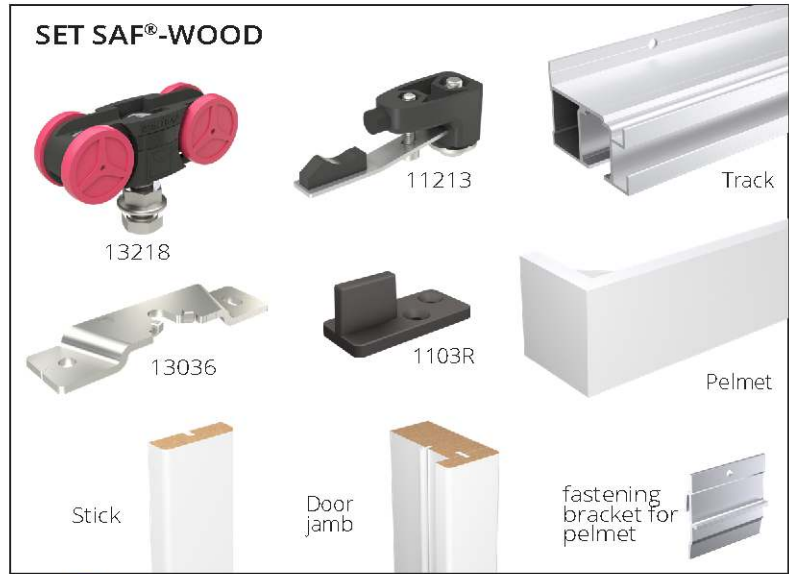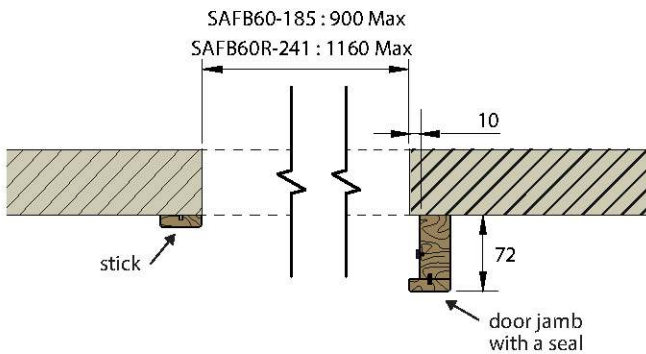

Quick and easy setup of the pelmet



SECOND SOFT-CLOSER OPTION

M65S	Softcloser for gentle closing of doors (100 mm). Softcloser automatically follows door to its closed position.. Suitable for doors weighing 10 - 20 KG . It is recommended that 2 softclosers be used for doors with a width of 830 mm or more.
M66S	Ditto for doors weighing 21 - 60 KG .

Conditions for 2 soft-closers **M65S** or **M66S**



For the best operating results, choose a softcloser adapted to the dead load of your door

