




Self closing sliding system for glass doors

SOFTCLOSE-GLASS®

See details of the standard EN 1527 page 4

*Operated sliding systems not concerned by the standard EN 1527



CAPACITY/DOOR	80 KG
DOOR THICKNESS	8 - 10 MM
TRACK	ALUMINIUM
MOVEMENT	STRAIGHT

READY-TO-INSTALL SET - THICKNESS 8 MM

Item Nr.	Description
Set includes:	
- 1 anodised aluminium track	
- 1 anodised aluminium track pelmet with 2 ends caps and 2 pelmet brackets	
- 2 anodised aluminium clamps*	
- 2 rollers with ball bearings mounted on plates	
- 1 clamp covering (2 clamp pelmets and 2 end pieces (anodised effect))	
- 1 hydraulic brake	
- 1 rack	
- 1 door closing device (spiral spring)	
- 2 stops	
- 1 lower guide	
- Installation instructions and tools	
SC-70GA8	For opening of 0.65 m to 0.70 m
SC-80GA8	For opening of 0.75 m to 0.80 m
SC-90GA8	For opening of 0.85 m to 0.90 m
SC-100GA8	For opening of 0.95 m to 1.0 m
SC-145GA8	For opening of 1.40 m to 1.45 m

*Clamp is suitable for Securit glass and does not require any drilling of the glass panel.

READY-TO-INSTALL SET - THICKNESS 10 MM

Set includes:	
Ditto 8 mm set	
SC-70GA10	For opening of 0.65 m to 0.70 m
SC-80GA10	For opening of 0.75 m to 0.80 m
SC-90GA10	For opening of 0.85 m to 0.90 m
SC-100GA10	For opening of 0.95 m to 1.0 m

OPTION CLOSING

3012CSC	Additional rack (L = 570 mm) allowing to increase the closing timing (for kit SC-145GA8 use 2 racks).
SC-TR	Timer on the right side: the door stays opened until 60 seconds before closing
SC-TL	Ditto for the left side


SET CONTENTS



See accessories p. 36



Self closing sliding system designed for aeras that must stay closed. Suitable for doors of 8 and 10 mm thickness.

- PRACTICAL: 5 kits ready to fit for widths of openings from 650 to 1450 mm
- SILENT: Integrated hydraulic brake for a soft and silent closing
- CONFORTABLE: Adjustable closing speed
- DESIGN: Perfect finish with anodized aluminium pelmet (with returns)
- Clamp is suitable for Securit glass and does not require any drilling of the glass panel


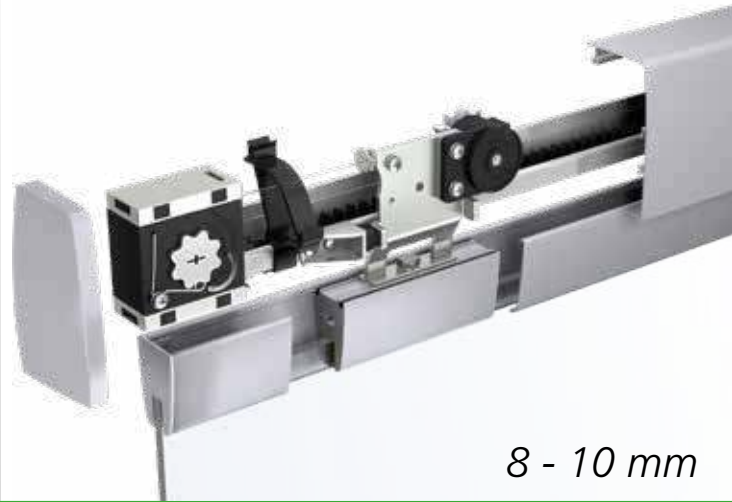


SOFTCLOSE-GLASS®

SOFTCLOSE-GLASS®

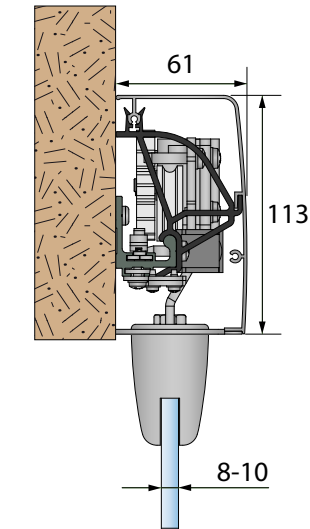


Vertical section of the system

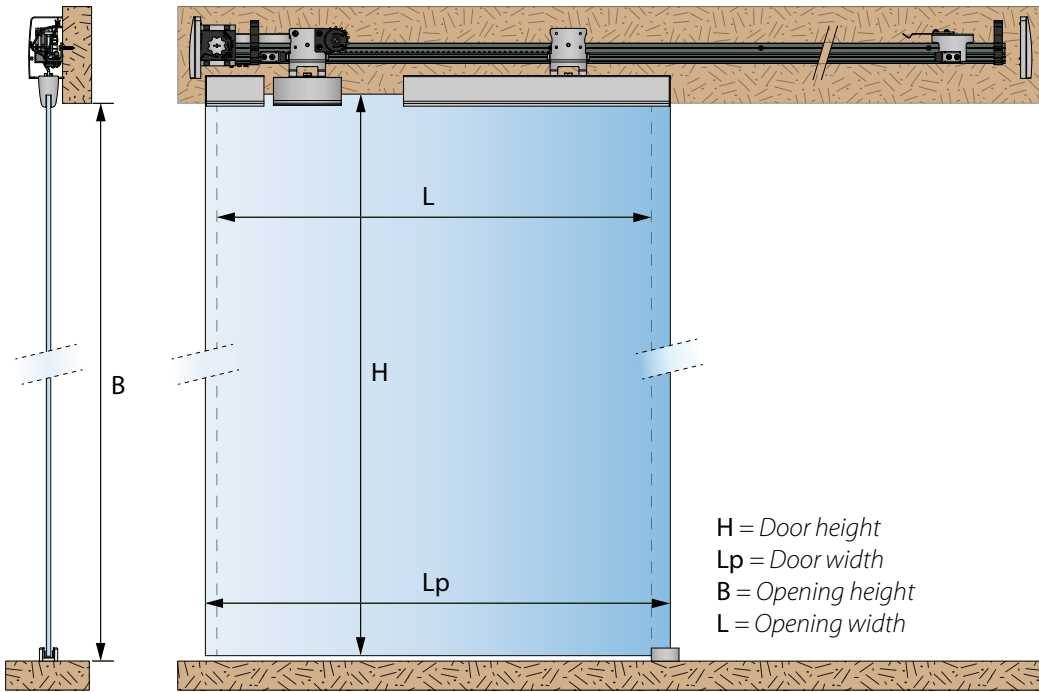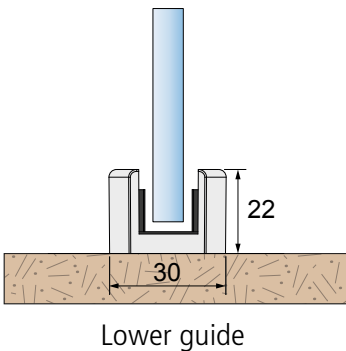

DIMENSIONS:

KIT 8 mm	KIT 10 mm	Opening width (L)	Door width (Lp)	Door height (H)
SC-70GA8	SC-70GA10	650 - 700	L + 55	B - 40
SC-80GA8	SC-80GA10	750 - 800	L + 55	B - 40
SC-90GA8	SC-90GA10	850 - 900	L + 55	B - 40
SC-100GA8	SC-100GA10	950 - 1000	L + 55	B - 40
SC-145GA8	SC-145GA10	1400 - 1450	L + 55	B - 40

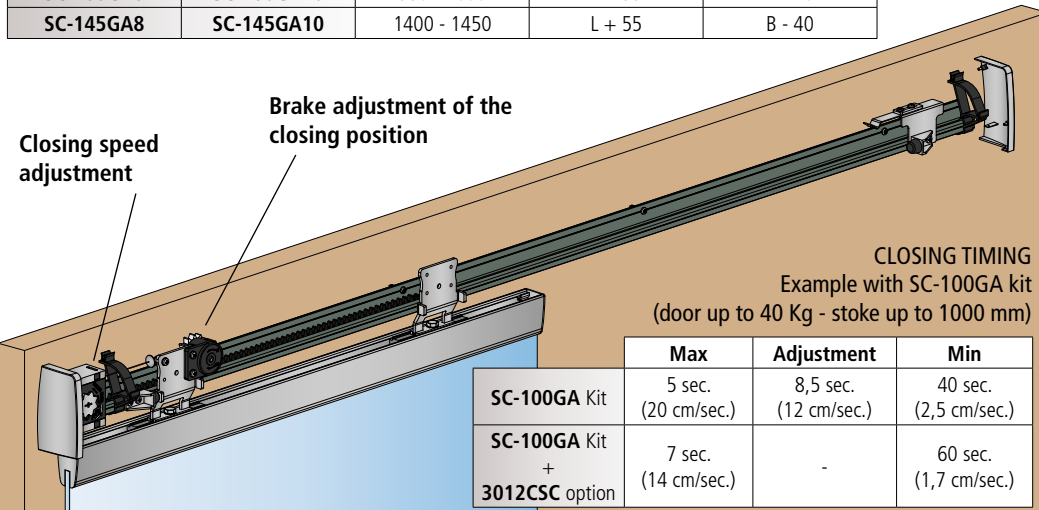

	Max	Adjustment	Min
SC-100GA Kit	5 sec. (20 cm/sec.)	8,5 sec. (12 cm/sec.)	40 sec. (2,5 cm/sec.)
SC-100GA Kit + 3012CSC option	7 sec. (14 cm/sec.)	-	60 sec. (1,7 cm/sec.)