


For doors up to 150 - 200 & 400 Kg*

* 600 Kg with track STARAL 10600



MANTION products have been tested in accordance with the European **EN 1527 (version 2017)** requirements

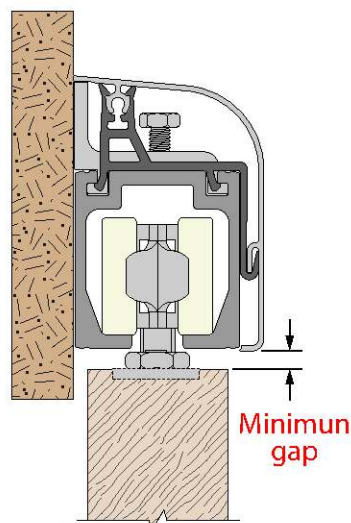

NOISELESS:

rollers fitted with nylon wheels mounted on ball bearing

AESTHETIC:

rollers have been designed to reduce the gap between the top of the door and the bottom of the track

ROBUSTNESS:

rollers NC2 are equipped with stainless steel framing defects





Straight sliding system with aluminium track for wooden doors up to 400 KG* - **STARAL PLUS®**

* 600 Kg with track STARAL 10600

TRACKS AND ACCESSORIES

150 KG	200 KG	400 KG	Fig.	Description
10300/200	-	-	1	Raw aluminium track in length of 2 m.
10300/300	-	-		Ditto. Length: 3 m.
-	10400/400	10500/400		Ditto. Length: 4 m.
-	10400/500	10500/500		Ditto. Length: 5 m.
10300/600	10400/600	10500/600		Ditto. Length: 6 m.
-	10400A/600	10500A/600		Anodized aluminium track in length of 6 m.
10033	10043	10053	2	Sliding angle plate for wall-fixing.
-	10043 M	10053 M	3	Sliding jointing bracket for wall-fixing.
-	10044	10054	4	Sliding bracket for top-fixing.
-	10044 M	10054 M	5	Sliding jointing bracket for top-fixing.
-	GH10430BP	GJ10530BP	6	Set of 4 fastening clips for pelmet.
-	GH10430P	GJ10530P	7	Raw aluminium pelmet in length of 6 m.

FOR DOORS UP TO 150 KG track 10300

Item Nr.	Fig.	Description	
9232NC2	10	Roller with stainless steel framing and nylon wheels mounted on ball bearing top fixing Ø M8. To be used with plates 0036XM8.	2
0036XM8	11	INOX Screwing plate, top-fixing Ø M8 - 100 x 25 - Thickness: 25/10°	
9139-1	14	Stop.	12

FOR DOORS UP TO 200 KG track 10400



Item Nr.	Fig.	Description	
9242NC	9	Roller with bracket to be screwed, fitted with 4 nylon wheels mounted on ball bearing top fixing	2
9242NC2	10	Roller with stainless steel framing and nylon wheels mounted on ball bearing top fixing Ø M10. To be used with plates 0036 or adjustable apron 0031.	2
0036	11	Screwing plate, top-fixing Ø M10 - 100 x 25 - Thickness: 25/10°	20
0031	12	Adjustable apron set for 25 to 35 mm panels.	16
9149-1	14	Stop.	8

FOR DOORS UP TO 400 KG track 10500

Item Nr.	Fig.	Description	
9252NC	9	Roller with bracket to be screwed, fitted with 4 nylon wheels mounted on ball bearing top fixing.	2
9252NC2	10	Roller with stainless steel framing and nylon wheels mounted on ball bearing top fixing Ø M12. To be used with plates 0056 / 0055 or adjustable apron 0051.	2
0056	11	Screwing plate, top-fixing Ø M12 - 170 x 30 - Thickness: 40/10°	10
0051	12	Adjustable apron set for 40 to 50 mm panels.	10
0055	13	Welding plate, top-fixing Ø13 - 90 x 35 x 20 - Thickness: 50/10°	10
9159-1	14	Stop.	2


BOTTOM GUIDE

Item Nr.	Fig.	Description	
1109/...	15	Galvanized steel U profile 25 x 17 mm - Length: 1.5 / 2 / 3 / 6 m	
1109A/...	16	Aluminium U profile 25 x 18 mm - Length: 2 / 3 / 6 m	
1110/...	17	Galvanized steel U profile 30 x 30 mm - Length: 2 / 3 / 6 m	
1110GDL	18	Nylon guide for U-PROFILE 30 x 30 - 100 x 25 x 25 mm	8
1103RG	19	White plastic adjustable runner (14 to 30 mm) with screw and S6 dowel	10
1102	20	Plate with an olive guide, screwing type. For U-PROFILE 1109A	20



9242NC
9252NC

Track	A	B	E
10400	54.5	78.5	20
10500	71	105	24

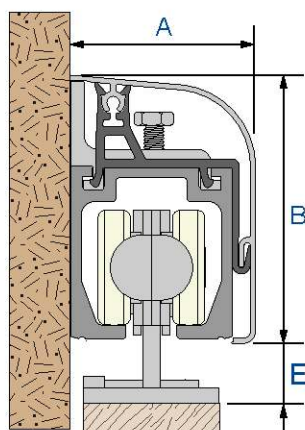


9232NC2
9242NC2
9252NC2

Track	A	B	E
10300*	-	-	5 min
10400	54.5	78.5	6 min
10500	71	105	7 min

*no pelmet for the track 10300

Example with embeded plate

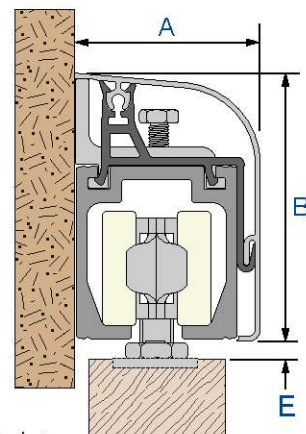

Item Nr.	A	B
10300	39	39
10400	51.5	47.5
10500	72	64.5