


System for folding sliding shutters

WIN-Fold 3

NEW



CAPACITY PER LEAF	25 kg
LEAF THICKNESS	A : 30-34 MM B : 36-40 MM
LEAF DIMENSIONS	600 x 3000 mm max. 0.9 m ² max. (solid)
TRACK	ALUMINIUM
MOVEMENT	FOLDING STRAIGHT

WIN-FOLD 3: All the expertise of a European specialist in a reliable and aesthetically pleasing system

- **Reliable:** To ensure resistance to weather conditions, the fasteners and hinges are made of stainless steel, and the frame and guide bodies are made of anodized aluminum. The roller bearings are mounted on ball bearings and equipped with a ball joint to guarantee smooth, consistent movement over time. An anti-derailment system prevents the lower guides from coming out of the guide profile during shutter movement.
- **Aesthetics:** When the shutter is closed, the rail and guide profile are concealed behind the panels, allowing facades to be clad with visual continuity between adjacent shutters and between shutters on different floors. The rails and guide profiles are available in anodized and raw finishes.

WIN-Fold 3



NEW

MADE IN FRANCE
SINCE 1920


SLIDING FOLDING

NEW

2-point lock 1325-2,
The solution that integrates seamlessly
with the WIN-FOLD 3 folding sliding system.

- Strikers integrated into the track and lower guide profile
- Automatic release
- Simultaneous top and bottom unlocking with a single lever
- Aluminum return rods

Example of 4 + 4 monting

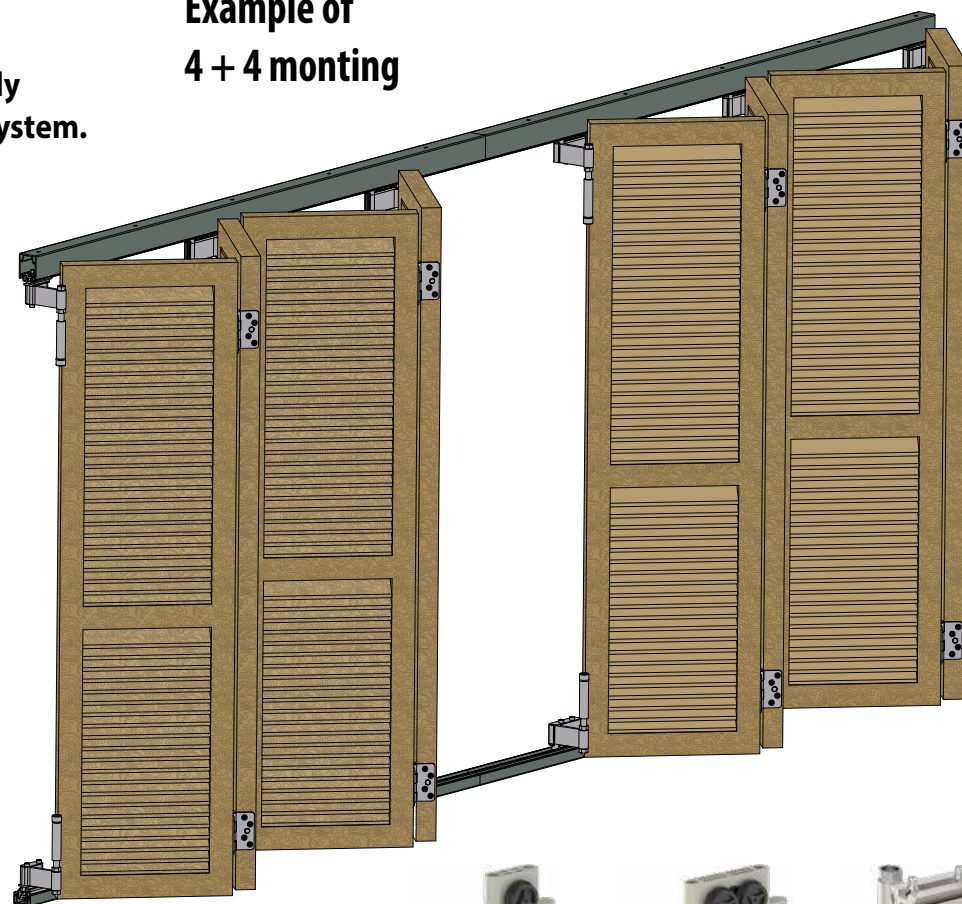


Upper track

Guide profile
reveal fittingGuide profile
face mounting


Hinge

Fixed
pointIntermediate
rollerMobile end
roller




Reveal fitting

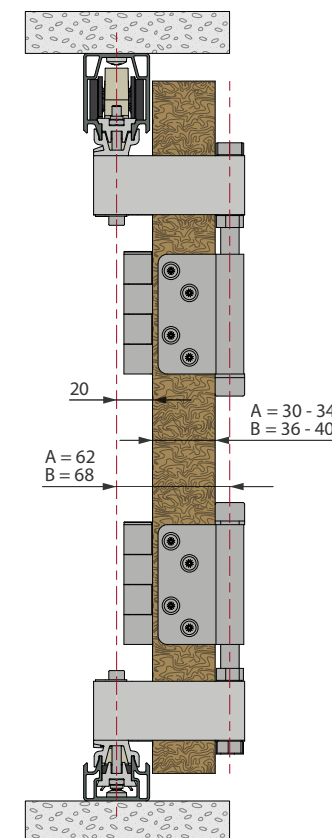

Face mounting

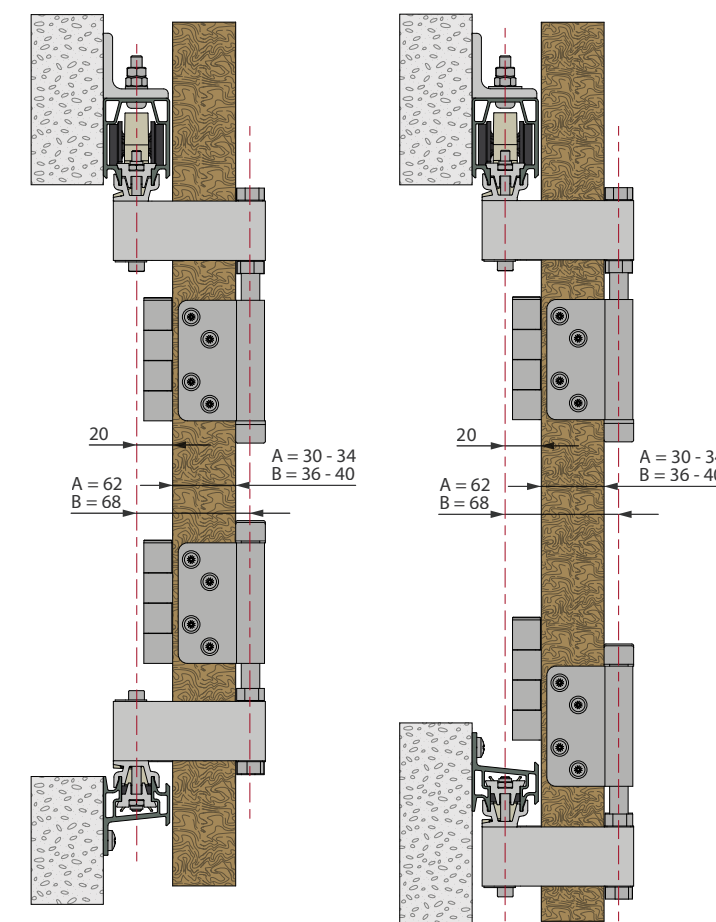

Track & Profiles



QUOTE ONLINE
SlidSoft

It is easy to determine the solution!
Simply enter the dimensions of your opening
and your options.
You will also have access to the full details of
the products and plans.



Configurator



Your project

Dimensions

Products list

Drawings & documentation